


BRC Steam 3 220-240V - 120*90mm


Device instruction manual



Please read this instruction manual carefully before using the device

Warning
Do not use the machine while charging. Liquid cannot exceed warning line in the tank.

I . Product Spare Parts Description

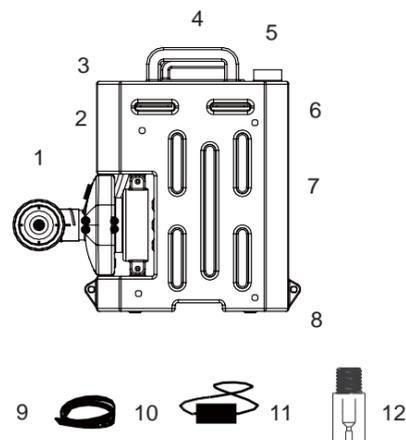


- | | | |
|---------------|-------------|-----------------|
| 1.Atomizer | 2.Air pipe | 3.Switch |
| 4.Tank | 5.Tank Cap | 6.Charging port |
| 7.Battery box | 8.Motor box | 9.Measuring cup |
| 10.Strap | 11.Adapter | 12.Nozzle |

II . Product specifications and technical parameters

Specification	Parameter
Rated voltage	DC 24V
Volume	8L
Rated power	240W
Spray volume	25-350ml/min(adjustable)
Droplet size	<50µm
Spraying distances	5-8M
Battery	24V
Product size	477.3*186.5*462mm

III . The operation instruction:

1.Add the disinfectant liquid in the water tank and after is completed tighten the tank cap. (Noted: Do not add more liquid than the maximum capacity of the water tank, otherwise the liquid will flow into the battery box will damage the machine). Turn on the power switch of the device, the machine begin to work (as shown below).



3.After used up disinfectant liquid, put some water in the tank and work around 1-2 minutes to avoid the disinfectant liquid blocking or corroding the nozzles and pipes.

IV . Battery use and maintenance

The machine can charge for the whole device.

- Charging instructions: When the battery is in the charging state, the charger indicator is red, and the charger indicator will be green when fully charged.
- Device charging scheme: the device must be placed in a safe, dry and normal temperature environment for charging; the device must be turned off during charging; prevent the device from being stable when charging, and connect the charger to the charging connector on the side of the device. Keep charging until the indicator light turns green; the charging time is around 15-16 hours.

V . Fault analysis and Solution

Reason	Solution
1. Fault phenomenon: the motor does not run. a. The battery power is low.	A. Charging

Reason Solution

2. Fault phenomenon: the motor runs but does not spray. a. No liquid in tank. b. The tank cap is not tightened. c. The nozzle is blocked.	A. Add liquid. B. Check whether there is tighten the cap. C. Remove the nozzle to clean.
--	--

VI . Attentions

- Please fully charge the battery before using.
- If it is found that the equipment has entered the water, you need to wait for it to dry completely before turning it on.
- Please use the device at the ambient temperature between 0 ~ 40°C, Do not strike with heavy or sharp objects and prevent it from falling, please use the special battery configured with this device, prohibit to use other types of batteries to avoid damaged product.
- Please turn off the machine when charging the battery.
- Please keep the battery fully charged and recharge it every month If the device is not used for a long time.
- Don't use the strong corrosive liquid. The water-soluble chemicals must be completely dissolved. The liquid which added to tank must be free of impurities to prevent clogging of the pipeline.

- After long-term use machine, please remove and clean the filter cotton, dry it and then put it back the device continues to be used.
 - The maximum amount of added liquid cannot exceed the warning line.
 - Please cut off the power immediately If the following situations occur :
 - Water leak into the device;
 - The pump system stopped suddenly;
 - The pump sound changes noticeably
 - The tank leaking water;
 - The pump does not work or other abnormal conditions during start up.
 - Prohibit to use the device in the rain
 - Prohibit to use wet hand to "plug" and "unplug" the battery and adapter; Keep the device away from the flammable and explosive and high temperature environment.
- ## VII . Warranty and after-sales service
- Equipment warranty and attentions
(1). All devices enjoy 12 months free maintenance (from the day of sale).
 - Free maintenance requirements: Warranty card, invoice or other certification which can prove it ordered from our company.

(3). The fault caused by human error or wrong operation is without warranty.

VII . Accessories and spare parts

Product	Specification	Quantity	Remark
Device	Host	1PC	
Adapter	DC 24V	1PC	
Strap	1.3M	2PC	
Nozzle	Nozzle specification 0.5mm 1.5mm	1PC	Corresponding droplet size 0.5mm <40µm 1.5mm <80µm
Measuring cup	100ml	1PC	
Hardware accessory	Zinc alloy+SUS304	1PC	
User manual		1PC	